




SOFT MAGIC BARRIER HOSES with the Exclusive..

EZ TURN ANTI-BLOWBACK FITTING

UNDER PRESSURE

EZ Turn Anti-Blowback fitting has a thrust bearing that reduces friction so the service hose can be easily connected to the access fitting while under pressure. Compact design fits in tight work spaces. Deep square knurling and textured orange and blue band for easy fingertip control!

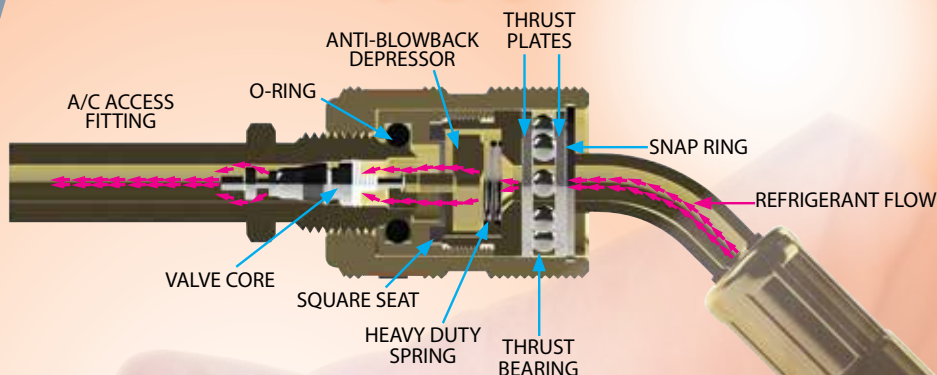

	Length	Red Part#	Yellow Part#	Blue Part#	Hose Set 1 Each R, Y, B Part#
1/4" EZ TURN ANTI-BLOWBACK FITTING RATED FOR R-410A *2 YEAR WARRANTY	36" 90cm	EZ3R	EZ3Y	EZ3B	EZ3HS
	60" 150cm	EZ5R	EZ5Y	EZ5B	EZ5HS
	72" 180cm	EZ6R	EZ6Y	EZ6B	EZ6HS
	25' 7.50m	EZ25R	EZ25Y	EZ25B	EZ5HDS
	50' 15.00m	EZ50R	EZ50Y	EZ50B	Hose Set: [3] 5 ft. 1/4" Hoses and [1] 5 ft. 3/8" Hose
	100' 30.00m	EZ100R	EZ100Y	EZ100B	
R-410A Mini Split 5/16" EZ TURN ANTI-BLOWBACK FITTING (1/4" x 5/16")	36" 90cm	EZM3R	EZM3Y	EZM3B	EZM3HS
	60" 150cm	EZM5R	EZM5Y	EZM5B	EZM5HS
	72" 180cm	EZM6R	EZM6Y	EZM6B	EZM6HS

EZ TURN ANTI-BLOWBACK ADAPTORS

	Part#	Description
1/4"	EZAB	Straight 1/4" M. F. X 1/4" F. F.
	EZAB90	90° 1/4" M. F. X 1/4" F. F.
5/16" R-410A Mini Split	EZABM	Straight 1/4" M. F. X 5/16" F. F.
	EZABM90	90° 1/4" M. F. X 5/16" F. F.
Replacement Parts	EZHRK	Pkg. of (1) Spring - (1) Anti-Blowback Depressor (1) Square Seat - (1) O-Ring Depressor (1) Gasket



Rated for R-410A, CFC, HCFC & HFC Refrigerants
Maximum Working Pressure: 800 PSI
Burst Pressure: 4000 PSI



EZHR EZ TURN Hose Display Rack (Holds up to 50 Hoses)



2850 Ravenswood Road, Fort Lauderdale, FL 33312 U.S.A.
Customer Service: 800.323.2119 584.2000 • Fax: 954.587.0109
info@uniweld.com • www.uniweld.com